


Trójniki spawane równoramienne (produkowane z rur)

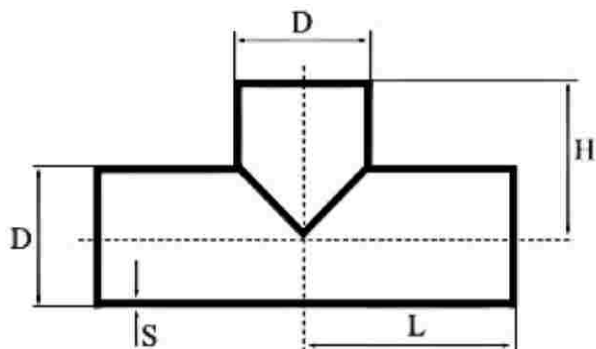

Wykonane zgodnie z ISO 5251 (ANSI B16.9)
z rur spawanych zgodnie z DIN 17457
Współczynnik spawu V=1,0.

D mm	S mm	L mm	H mm	waga kg	gatunek 00H18N10 (1.4306)	gatunek 00H17N14M2 (1.4404)
38,0	2,5	43,0	43,0	0,27		
44,5	2,5	51,0	51,0	0,44		
57,0	2,5	64,0	64,0	0,72		
108,0	2,5	105	105	1,45		
133,0	3,0	124	124	4,30		
159,0	3,0	143	143	5,50		
254,0	2,0	216	216	7,50		
256,0	3,0	216	216	10,7		
273,0	2,0	216	216	7,00		
273,0	3,0	216	216	10,7		
273,0	4,0	216	216	14,2		
304,0	2,0	254	254	9,70		
306,0	3,0	254	254	15,3		
323,9	2,0	254	254	9,70		
323,9	3,0	254	254	15,3		
323,9	4,0	254	254	19,5		
323,9	5,0	254	254	25,7		
355,6	3,0	279	279	17,6		
355,6	4,0	279	279	21,9		
355,6	5,0	279	279	30,9		
406,4	3,0	305	305	24,2		
406,4	4,0	305	305	30,2		
406,4	5,0	305	305	37,6		
457,0	3,0	343	343	31,2		
457,0	4,0	343	343	39,0		
457,0	5,0	343	343	48,5		
508,0	3,0	381	381	36,0		
508,0	4,0	381	381	48,0		
508,0	5,0	381	381	60,0		
508,0	6,0	381	381	72,0		
609,6	3,0	432	432	52,0		
609,6	4,0	432	432	69,0		
609,6	5,0	432	432	86,0		
609,6	6,0	432	432	104		