


Redukcje spawane wyciskane z rur DIN 2616

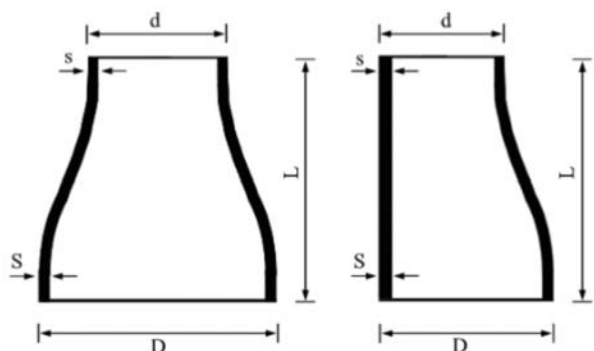

Tolerancje

Wymiar	Średnica zew.	Grubość ścianki
21,3-76,1	+/- 1,0%	min. +/- 12,5% max. 15%
-114,3	+/- 0,5 mm	
-219,1	+/- 1,0%	

D mm	S mm	d mm	s mm	L mm	waga kg	Symetryczne			Nie symetryczne
						1H18N9T i H17N13M2T	0H22N24M4TCu	00H17N14M2	1H18N9T i H17N13M2T
26,90	1,60	21,30	1,60	38,0	0,04	✓			
26,90	2,60	21,30	2,60	38,0	0,04		✓		
33,40	2,00	21,30	1,60	50,0	0,07	✓		✓	
33,70	2,00	26,90	1,60	50,0	0,07	✓			
33,70	3,20	26,90	2,60	50,0	0,10		✓		
42,40	2,00	33,70	2,00	50,0	0,10	✓			
48,30	2,00	21,30	1,60	64,0	0,15	✓			
48,30	2,00	26,90	1,60	64,0	0,15	✓			
48,30	2,00	33,70	2,00	64,0	0,15	✓			
48,30	2,00	42,40	2,00	64,0	0,15	✓			
48,30	3,20	42,40	3,20	64,0	0,25		✓		
60,30	2,00	26,90	1,60	76,0	0,20	✓			
60,30	2,00	33,70	2,00	76,0	0,20	✓		✓	
60,30	2,00	42,40	2,00	76,0	0,20	✓			
60,30	2,00	48,30	2,00	76,0	0,20	✓		✓	
76,10	2,30	48,30	2,00	90,0	0,33	✓			
76,10	3,00	48,30	2,00	90,0	0,47		✓		
76,10	3,00	48,30	2,77	90,0	0,47		✓		
76,10	3,00	60,30	2,00	90,0	0,47		✓		
76,10	3,05	60,30	2,77	90,0	0,47		✓		
88,90	2,30	48,30	2,00	90,0	0,42	✓			
88,90	3,00	48,30	3,00	90,0	0,60		✓		
88,90	2,30	60,30	2,00	90,0	0,42	✓			
88,90	3,05	60,33	2,77	90,0	0,60			✓	
88,90	3,05	76,10	3,00	90,0	0,60		✓		
88,90	5,49	76,10	4,00	90,0	1,06		✓		
114,3	2,60	48,30	2,00	100	0,65	✓			✓
114,3	2,60	60,30	2,00	100	0,65	✓	✓	✓	✓
114,3	3,00	60,30	3,00	100	0,80		✓		
114,3	2,60	76,10	2,30	100	0,69	✓			✓
114,3	3,05	76,10	3,00	100	0,80		✓		
114,3	2,60	88,90	2,30	100	0,69	✓			
139,7	2,90	114,3	2,60	127	1,25	✓			✓
139,7	2,90	88,90	2,30	127	1,22	✓			✓
139,7	2,90	76,10	2,30	127	1,16	✓			✓
139,7	3,00	114,3	3,00	127	1,25		✓		
168,3	2,90	88,90	2,30	140	1,76	✓			✓
168,3	2,90	114,3	2,60	140	1,80	✓			✓
168,3	2,90	139,7	2,60	140	1,80	✓			✓
219,1	3,20	114,3	2,90	152	3,10	✓			✓
219,1	3,20	139,7	2,90	152	3,30	✓			✓
219,1	3,20	168,3	2,90	152	3,30	✓			✓