


# Kołnierze szyjkowe ANSI

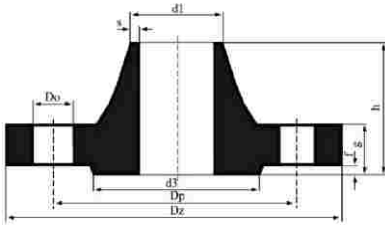

150 Lbs dostępne w gatunkach  
00H18N10 00H17N14M2

DN	Cal	Gr.	Kołnierz							Śruby			masa
			Rura D <sub>1</sub>	Dz	g	Dp	h	s	d <sub>3</sub>	liczba	gwint	Do	
15	1/2"	10 S	21,3	88,9	11,1	60,3	47,6	2,11	34,9	4	12,7	15,9	0,7
		40 S STD						2,77					
		80 S XS						3,73					
20	3/4"	10 S	26,7	98,4	12,7	69,8	52,4	2,11	42,9	4	12,7	15,9	0,8
		40 S STD						2,87					
		80 S XS						3,91					
25	1"	10 S	33,4	107,9	14,3	79,4	55,6	2,77	50,8	4	12,7	15,9	1,1
		40 S STD						3,38					
		80 S XS						4,55					
32	1 1/4"	10 S	42,2	117,5	15,9	88,9	57,1	2,77	63,5	4	12,7	15,9	1,5
		40 S STD						3,56					
40	1 1/2"	10 S	48,3	127,0	17,5	98,4	61,9	2,77	73,0	4	12,7	15,9	1,8
		40 S STD						3,68					
		80 S XS						5,08					
50	2"	10 S	60,3	152,4	19,0	120,6	63,5	2,77	92,1	4	15,9	19,0	2,7
		40 S						3,91					
		80 S XS						5,54					
65	2 1/2"	10 S	73,1	177,8	22,2	139,7	69,8	3,05	104,8	4	15,9	19,0	4,4
		40 S STD						5,16					
80	3"	10 S	88,9	190,5	23,8	152,4	69,8	3,05	127,0	4	15,9	19,0	5,2
		40 S STD						5,49					
		80 S XS						7,62					
	3 1/2"	10 S	101,6	215,9	23,8	177,8	71,4	3,05	139,7	14	15,9	19,0	5,4
		40 S STD						5,74					
		80 S XS						8,08					
100	4"	10 S	114,3	229,6	23,8	190,5	76,2	3,05	157,2	8	15,9	19,0	7,5
		40 S STD						6,02					
		80 S XS						8,56					
125	5"	10 S	141,3	254,0	23,8	215,9	88,9	3,40	185,7	8	15,9	22,2	9,2
		40 S STD						6,55					
150	6"	10 S	168,3	279,4	25,4	241,3	88,9	3,40	215,9	8	19,0	22,2	11,0
		40 S STD						7,11					
		80 S XS						10,97					
200	8"	10 S	219,1	342,9	28,6	298,5	101,6	3,76	269,9	8	19,0	22,2	18,4
		40 S STD						8,18					
250	10"	10 S	273,0	406,4	30,2	361,9	101,6	4,19	323,9	12	19,0	25,4	25,5
		40 S STD						9,27					
		80 S XS						12,7					
300	12"	10 S	323,9	482,0	31,7	431,8	114,3	4,57	381,0	12	22,2	25,4	37,0
		40 S STD						9,53					
350	14"	10 S	355,6	533,4	34,9	476,2	127,0	4,78	412,8	12	22,2	28,5	51,0
		40 S STD						9,53					
400	16"	10 S	406,4	596,9	36,5	539,7	127,0	4,78	469,9	16	25,4	28,5	61,5
		40 S STD						9,53					
450	18"	10 S	457,1	635,0	39,7	577,8	139,7	4,78	533,4	16	25,4	32,0	71,5
500	20"	10 S	508,0	698,5	42,9	635,0	144,5	5,54	584,2	20	28,6	32,0	85,0
		40 S STD						9,53					
550	22"	10 S	558,8	749,3	46,0	692,1	149,2	6,35	641,2	20	31,7	35,0	102,0
		40 S STD						9,53					
600	24"	10 S	609,6	812,8	47,6	749,3	152,4	6,35	692,2	20	28,6	35,0	119,0
		40 S STD						9,53					