


Kołnierze płaskie do przyspawania PN 10 (DIN 2576)

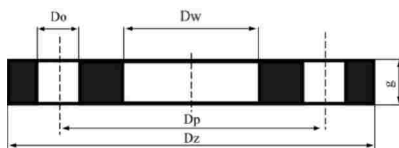

Dostępne w gatunkach :1H18N9T, H17N13M2T,
00H18N10, 00H17N14M2, 0H22N24M4TCu

DN	Rura	Kołnierz				Śruby			masa
		Dz	Dw	g	Dp	liczba	gwint	Do	
10	13.5	90,0	14.0	14,0	60	4	M 12	14	0,60
	17.2		17.7						
15	18.0	95,0	18.5	14,0	65	4	M 12	14	0,67
	20.0		21.5						
	21.3		22.0						
20	23.0	105	23.0	16,0	75	4	M 12	14	0,86
	25.0		26.0						
	26.9		27.6						
25	28.0	115	29.0	16,0	85	4	M 12	14	1,10
	30.0		31.0						
	33.7		34.4						
32	35.0	140	36.0	16,0	100	4	M 16	18	1,65
	38.0		39.0						
	42.4		43.1						
40	43.0	150	44.0	16,0	110	4	M 16	18	1,86
	44.5		45.5						
	48.3		49.0						
50	54.0	165	55.0	18,0	125	4	M 16	18	2,50
	57.0		58.1						
	60.3		61.5						
65	69.0	185	70.0	18,0	145	4	M 16	18	3,00
	76.1		77.1						
80	84.0	200	85.0	20,0	160	8	M 16	18	3,79
	88.9		90.3						
100	104.0	220	105.0	20,0	180	8	M 16	18	4,20
	108.0		109.6						
	114.3		115.9						
125	129.0	250	131.0	22,0	210	8	M 16	18	5,60
	133.0		134.8						
	139.7		141.6						
150	154.0	285	156.0	22,0	240	8	M 20	22	6,70
	159.0		161.1						
	168.3		170.5						
200	204.0	340	206.5	24,0	295	8	M 20	22	9,30
	219.1		221.8						
250	254.0	395	257.5	26,0	350	12	M 20	22	12,3
	267.0		270.2						
	273.0		276.5						
300	306.0	445	308.5	26,0	400	12	M 20	22	13,8
	318.0		321.5						
	323.9		327.6						
350	355.0	505	359.0	28,0	460	16	M 20	22	20,5
	355.6		359.7						
	368.0		372.2						
400	406.0	565	410.5	32,0	515	16	M 24	26	26,5
	406.4		411.0						
	419.0		423.7						
500	508.0	670	513.6	38.0	620	20	M 24	26	41.1
600	610.0	780	616.5	40.0	725	20	M 27	30	58.4
800	813.0	1015	820.0	44.0	950	24	M 30	33	81.0
1000	1016	1230	1023	60.0	1160	28	M 33	36	161
1200	1220	1455	1226	75.0	1380	32	M 36	39	261
1400	1420	1675	1426	85.0	1590	36	M 39	42	371
1600	1620	1915	1626	100	1820	40	M 45	48	574
2000	2020	2325	2026	120	2230	48	M 45	48	880